




Sonic Beam SB-24

Product Overview

The SB-24 provides an isolated audio experience for one to two listeners.

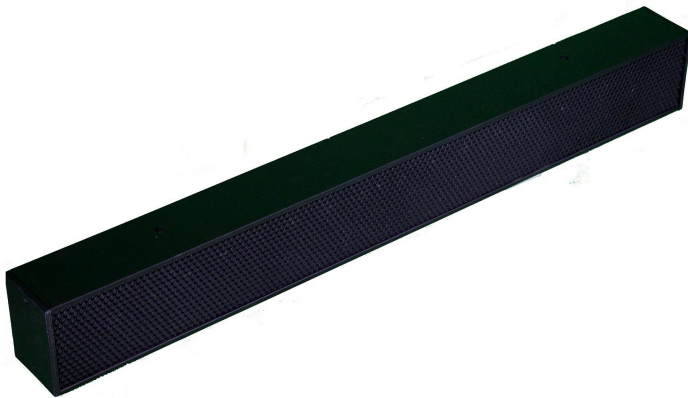

Amplification

Standard amp delivers audio in mono; can be wired for stereo for additional cost. Customize with Myriad for SmartVolume capabilities and sensor options.

Stereo Separation

6 dB

The listening area is a beam 24" wide that extends out 1 meter in front of the speaker.

Listening Region Dimensions: 50mm 'H x 50mm W x 83mm D

Frequency Response

150Hz – 20kHz, +/- 2dB

Amplifier Power Requirements

Minimum: 1 watt per channel Maximum: 100 watts peak per channel

Sensitivity

100 dB SPL 1 watt, 1 meter

Impedance

4Ω Stereo, 8Ω Mono

Physical Dimensions

622mm W x 55.8mm H x 70mm D

Mounting

The SonicBeam has mounting grommets placed 15" apart on the top of the speaker. An optional bracket is available to mount the SonicBeam underneath a screen. Connect to the Myriad amplifier with 3-conductor speaker wire.

Power Supply

17 Vac 1.25 Amp 120 Vac external wall pack supplied 100 Vac and 220 Vac available

